

# Showline

## SL PUNCHLITE 220



The SL PUNCHLITE 220 is a high performance luminaire, delivering a powerful blended beam. Rated for outdoor use, the PUNCHLITE is ideal for large outdoor stages and permanent outdoor applications.

The innovative and large motorized zoom range of 8-40 degrees delivers flexibility to your lighting design. Highlight performers, objects or building elements with a narrow shaft of light, or flood a wide area with a powerful wash of color using the RGBW or RGBA palette..

Configure the PUNCHLITE remotely via RDM, or locally through the comprehensive Showline LCD menu system. The robust split yoke allows quick setup in any orientation, and the optional accessory holder allows the use of third party accessories to shape and control the beam.

# Showline

## SL PUNCHLITE 220

### FEATURES


- Rugged construction
- 18pcs High Quality LEDs for exceptional output and color
- IP65 for wet locations and outdoor use
- Motorized optical system, featuring unmatched zoom range (8°- 40°) and HSIC (Hue, Saturation, Intensity, Colour Temperature) operation mode
- 8- or 16-bit DMX512-A operation for smooth stepless fades
- On-board LCD menu system for addressing and setup
- Remote configuration available via RDM
- 5-pin DMX512-A(RDM) in and thru connections
- RGBA or RGBW color

### BENEFITS

- Double yoke for floor standing or hanging
- Silent passive cooling
- Harmonize color calibration
- IP65 power and DMX in/thru connections

### HARMONIZE COLOR CALIBRATION TECHNOLOGY

At the heart of all Showline products is Harmonize Calibration technology. Harmonize is a proprietary, advanced LED color matching system, consisting of 3 correction modules: RGB, RGBW and Cool White/Warm White. Every Showline fixture undergoes rigorous testing to provide you with consistent control of color and intensity as well as output of the highest quality.

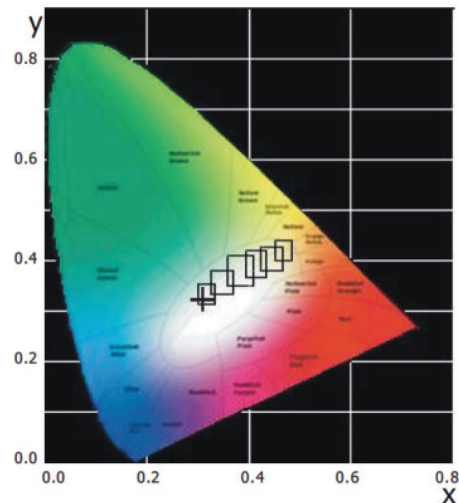

# Showline

## SL PUNCHLITE 220

### SOURCE

Type	18 high power RGBW LEDs
Wattage	230W

### OPTICAL PERFORMANCE

Lumen output	3,500
CRI/CQS	90 (RGBW)
Modes	HSIC RGBW 16-bit RGBW 8-bit

### BEAM

Beam angle	8-40°
------------	-------

### POWER

Operating voltage	100-240VAC
Max wattage	2300W

### DATA CONNECTIONS

DMX	Input / thru
Controls	Local LCD control, Master / slave

### DATA PROTOCOLS

DMX (RDM)	DMX-512A(RDM)
-----------	---------------

### PHYSICALS

IP rating	IP65
Finish	Black
Construction	Metal frame

### ENVIRONMENT

	°C	°F
Operating temperature	-10-45	14-113°F

### DIMENSIONS (H X W X L)

	mm	in
Fixture only	320 x 254 x 252	12.6 x 10 x 9.9
Packed dimensions		

### WEIGHT


	kg	lb
Net weight	10.4	23.01
Packed weight		

### WARRANTY & APPROBATION

Warranty	2 years
Approbations	CE, C-Tick/cETL

# Showline

## SL PUNCHLITE 220

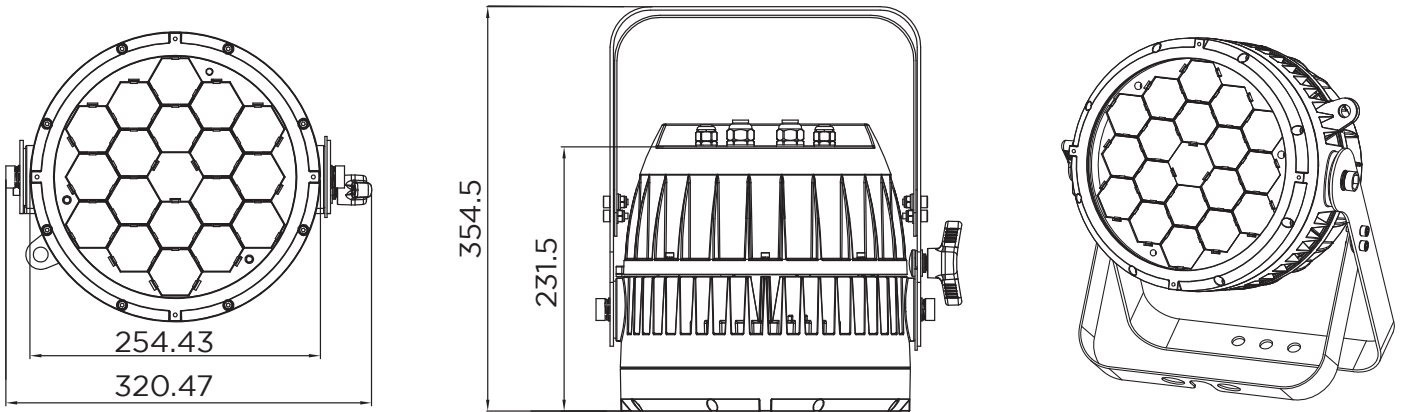

### PRODUCT NAME

SL PUNCHLITE 220, 18 high power RGBW LEDs, 8° to 40° powered zoom, IP65 rated captive power and data cables (UL3)

SL PUNCHLITE 220, 18 high power RGBW LEDs, 8° to 40° powered zoom, IP65 Rated captive power and data cables (bare-end)

Showline SL PUNCHLITE 220 RGBA LEDs, 8° to 40° powered zoom, IP65 Rated, captive power and data cables

### ORDER CODE

**89-095-6092-36**  
**SLPUNCHLITE220**

**88-095-6392-36**

**SLPUNHCLITE220A**

© 2018 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 89-095-6092-36-100-v00